



NQ-GA20P2 Integrated Power Amplifier Installation and Use



The NQ-GA20P2 is a 20W plenum rated Class D integrated power amplifier. Designed to operate over a 10/100 Ethernet network, the NQ-GA20P2 is IEEE 802.3at compliant and can be powered using Power-Over-Ethernet Plus (PoE+) or the optional Bogen PS4830W 48VDC power adapter. The NQ-GA20P2 can direct drive a single 8 ohm load and has a balanced line out to drive auxiliary power amplifiers.

Notice

Every effort was made to ensure that the information in this manual was complete and accurate at the time of printing; however, all information is subject to change.

This equipment is not suitable for use in locations where children are likely to be present. Equipment is intended for use only in a restricted access area.

WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.

Avertissement: pour réduire le risque d'incendie ou de choc électrique, ne pas exposer cet appareil sous la pluie et l'humidité.

The apparatus shall not be exposed to dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on apparatus.

L'appareil ne doit pas être exposé aux écoulements ou aux éclaboussures et aucun objet ne contenant de liquide, tel qu'un vase, ne doit être placé sur l'objet.

The ventilation should not be impeded by cover-

ing the ventilation openings with items, such as newspapers, table-cloths, curtains, etc.

- il convient que l'aération ne soit pas gênée par l'obstruction des ouvertures d'aéra

No naked flame sources, such as lighted candles, should be placed on the apparatus.

- il convient de ne pas placer sur l'appareil de sources de flammes nues, telles que des bougies allumées

The use of apparatus in moderate climates.

- si l'appareil est destiné à être utilisé sous un climat tempéré.

Important Safety Information

WARNING: To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture.

Always comply with the following basic safety precautions when installing and using the unit:

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Clean only with dry cloth.
6. DO NOT install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
7. Only use attachments/accessories that are specified by the manufacturer.
8. Unplug this apparatus during lightning storms or when unused for long periods of time.
9. Refer all servicing to qualified service

personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

Installation

To install the NQ-GA20P2 amplifier:

1. Attach the desired analog speakers to the NQ-GA20P2 using the pluggable connectors provided, where the 1 and 2 terminals connect to the +/- speaker wires. (See Figure 1.) The G (ground) shield terminal can be used if necessary.
2. If desired, attach an auxiliary amplifier to the NQ-GA20P2 using pins 1 and 2 of the pluggable balanced LINE OUT connector, taking note of the marked polarity (+/-). The G shield terminal can be used if necessary.
3. Connect a Cat5 type cable into the module's Ethernet port and ensure the other end of the cable is correctly connected to a PoE+ switch port on your network.


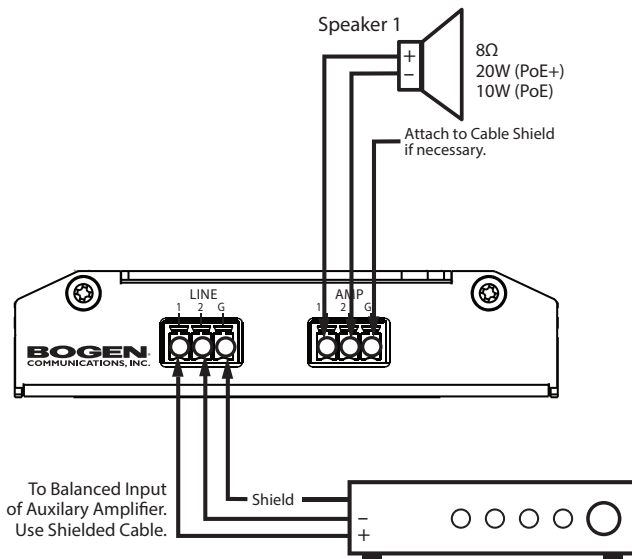


Figure 1

4. If using a 48V power supply, connect the PS4830PV 48VDC power supply to the

module.

Viewing and Understanding LEDs



Two LEDs appear on the front of the amplifier chassis. One is labeled POWER and appears as solid red during initial power up, flashes green during a boot sequence, and appears solid green when fully booted.

The STATUS LED uses the following indicators to provide information about the module:

- Flashing red – No network connection found.
- Solid blue – The amplifier is in an uninitialized state and is not associated to a server. (The server may be in a discovery mode.)

NYQUIST™

- Solid green – The amplifier is registered to a Nyquist server and is in normal operation.
- Flashing green – The amplifier has an IP address but is not registered with the Nyquist server.
- Solid red – The amplifier needs to be rebooted or reset so that the Nyquist application can resume.
- Flashing Blue – The amplifier is updating.

Using the Reset Button

The Reset button allows you to restart the amplifier or to reset the amplifier's configuration settings to the factory default settings.



For more information about resetting configuration settings, refer to the *Nyquist NQ-GA20P Configuration Manual*.

Temperature Indicator

In addition to the LEDs that appear on the actual appliance, a separate temperature status indicator appears on the module's web-based user interface. For more information, refer to the *Nyquist NQ-GA20P2 Configuration Manual*.

Compliance

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Limited Warranty, Exclusion of Certain Damages

The NQ-GA20P2 is warranted to be free from defects in materials and workmanship for five (5) years from the date of sale to the original purchaser. Any part of the product covered by this warranty that, with normal installation and use, becomes defective (as confirmed by Bogen upon inspection) during the warranty period will be repaired or replaced by Bogen, at Bogen's option, with new or refurbished product, provided the product is shipped insured and prepaid to: Bogen Factory Service Department: 4570 Shelby Air Drive, Suite 11, Memphis, TN 38118, USA. Repaired or replacement product(s) will be returned to you freight prepaid. This warranty does not extend to any of our products that have been subjected to abuse, misuse, improper storage, neglect, accident, improper installation or have been modified or repaired or altered in any manner whatsoever, or where the serial number or date code has been removed or defaced.

**THE FOREGOING LIMITED WARRANTY IS
BOGEN'S SOLE AND EXCLUSIVE WARRANTY
AND THE PURCHASER'S SOLE AND EXCLUSIVE**

REMEDY. BOGEN MAKES NO OTHER WARRANTIES OF ANY KIND, EITHER EXPRESS OR IMPLIED, AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED AND EXCLUDED TO THE MAXIMUM EXTENT ALLOWABLE BY LAW. Bogen's liability arising out of the manufacture, sale or supplying of products or their use or disposition, whether based upon warranty, contract, tort or otherwise, shall be limited to the price of the product. IN NO EVENT SHALL BOGEN BE LIABLE FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, LOSS OF PROFITS, LOSS OF DATA OR LOSS OF USE DAMAGES) ARISING OUT OF THE MANUFACTURE, SALE OR SUPPLYING OF PRODUCTS, EVEN IF BOGEN HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES OR LOSSES. Some States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may also have other rights which vary from State to State.

Products that are out of warranty will also be

repaired by Bogen Factory Service Department – same address as above or call 201-934-8500, at owner's expense. Returned products which do not qualify for warranty service, may be repaired or replaced at Bogen's option with a previously repaired or refurbished items. The parts and labor involved in these repairs are warranted for 90 days when repaired by the Bogen Factory Service Department. All parts and labor charges as well as shipping charges will be at the owner's expense.

All returns require a Return Authorization number. For most efficient warranty or repair service, please include a description of the failure.

11/2019